

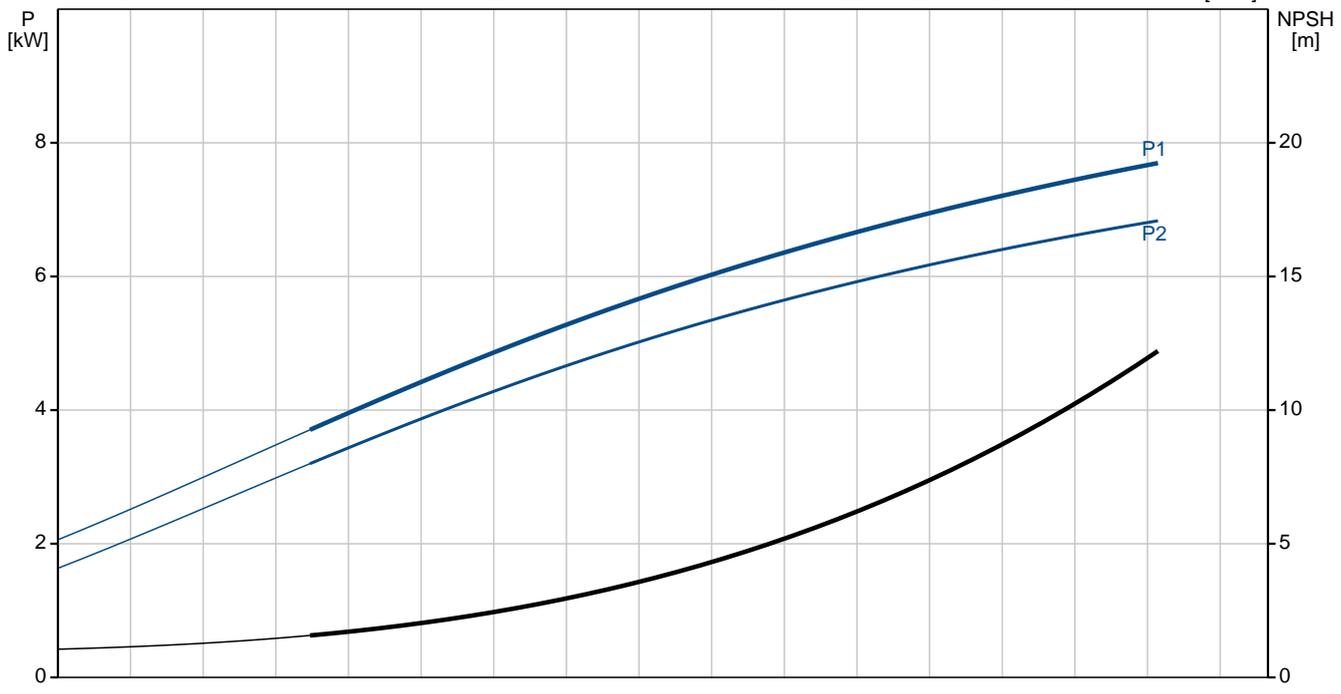




# 96806972 CM25-4 50 Hz

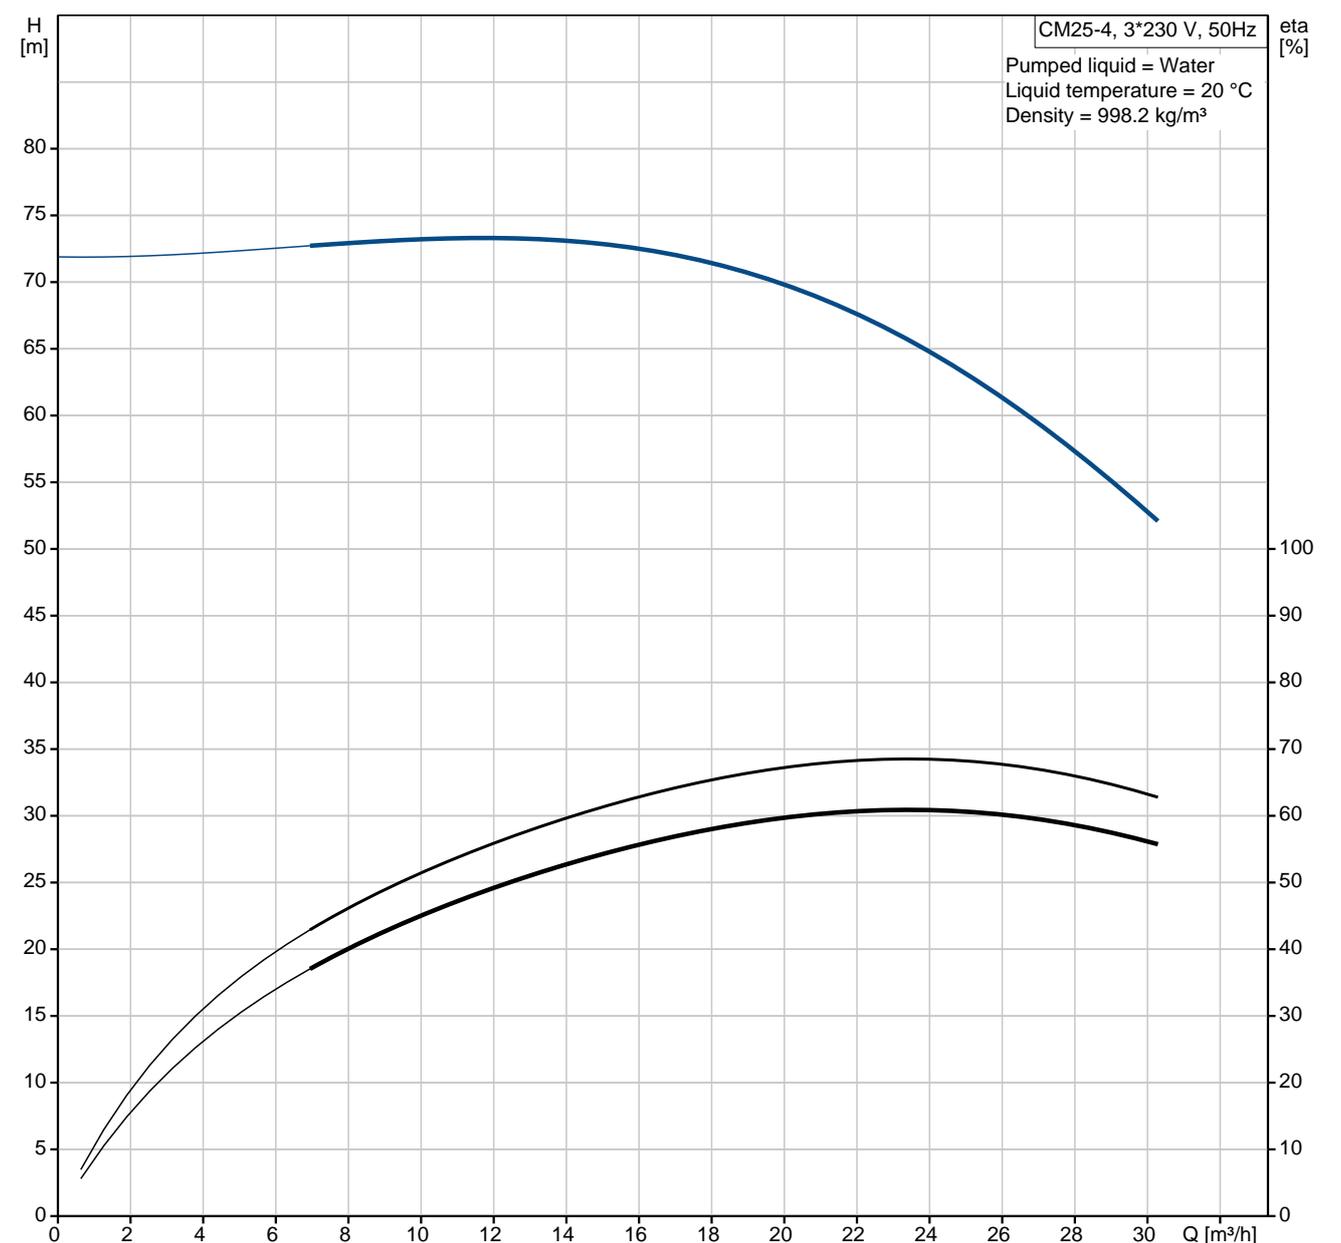

Description	Value
Product name:	CM25-4 A-R-A-E-AVBE
Product No:	96806972
EAN number:	5700310919195
Price:	On request
<b>Technical:</b>	
Speed for pump data:	2900 rpm
Rated flow:	22 m <sup>3</sup> /h
Rated head:	65.5 m
Impellers:	4
Shaft seal:	AVBE
Approvals on nameplate:	CE,WRAS,ACS,TR
Curve tolerance:	ISO 9906:1999 Annex A
Pump version:	A
Model:	A
<b>Materials:</b>	
Pump housing:	Cast iron
	EN-JL1030
	AISI 30 B
Impeller:	Stainless steel
	DIN W.-Nr. 1.4301
	AISI 304
Material code:	A
Rubber:	EPDM
Code for rubber:	E
<b>Installation:</b>	
Maximum ambient temperature:	55 °C
Maximum operating pressure:	10 bar
Max pressure at stated temp:	10 bar / 40 °C
Flange standard:	WHITWORTH THREAD RP
Connect code:	R
Pump inlet:	Rp 2
Pump outlet:	Rp 2
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	-20 .. 40 °C
Liquid temp:	20 °C
Density:	998.2 kg/m <sup>3</sup>
<b>Electrical data:</b>	
Motor type:	132SC
IE Efficiency class:	IE2
Rated power - P2:	7.4 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 220-240D/380-415 V
Service factor:	1
Rated current:	25,5-26,5/14,8-15,4 A
Rated speed:	2910-2930 rpm
Efficiency:	IE2 88,1 %
Motor efficiency at full load:	88,1 %
Enclosure class (IEC 34-5):	IP55
Insulation class (IEC 85):	F
Motor protec:	TP211
<b>Others:</b>	
Minimum efficiency index, MEI :	0,7
Net weight:	56.4 kg
Gross weight:	58.9 kg

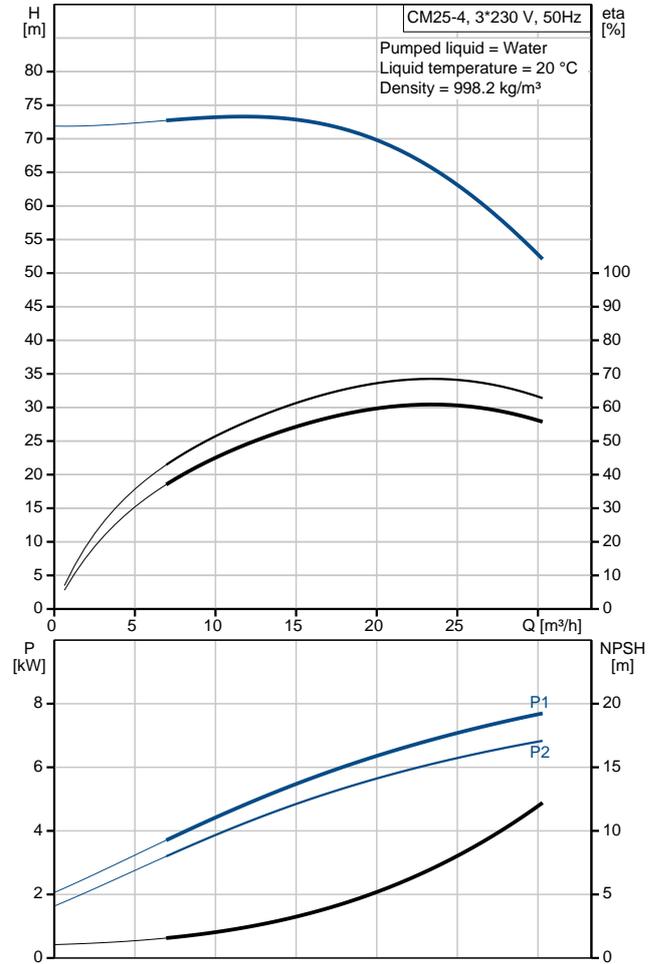

96806972 CM25-4 50 Hz

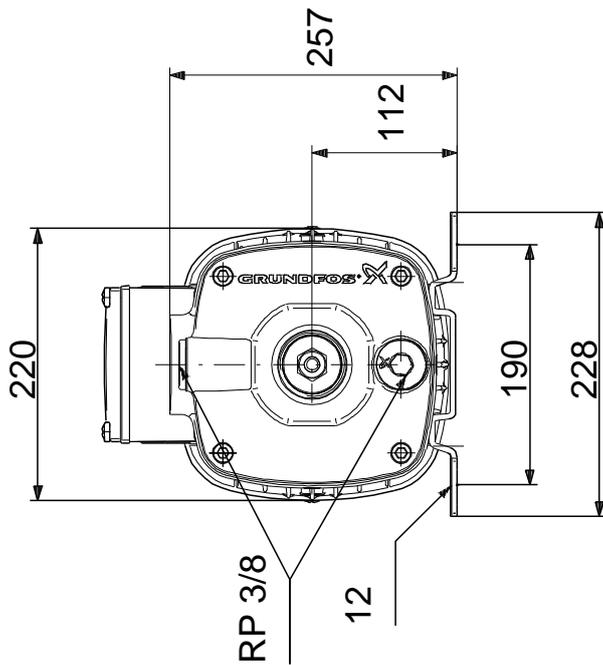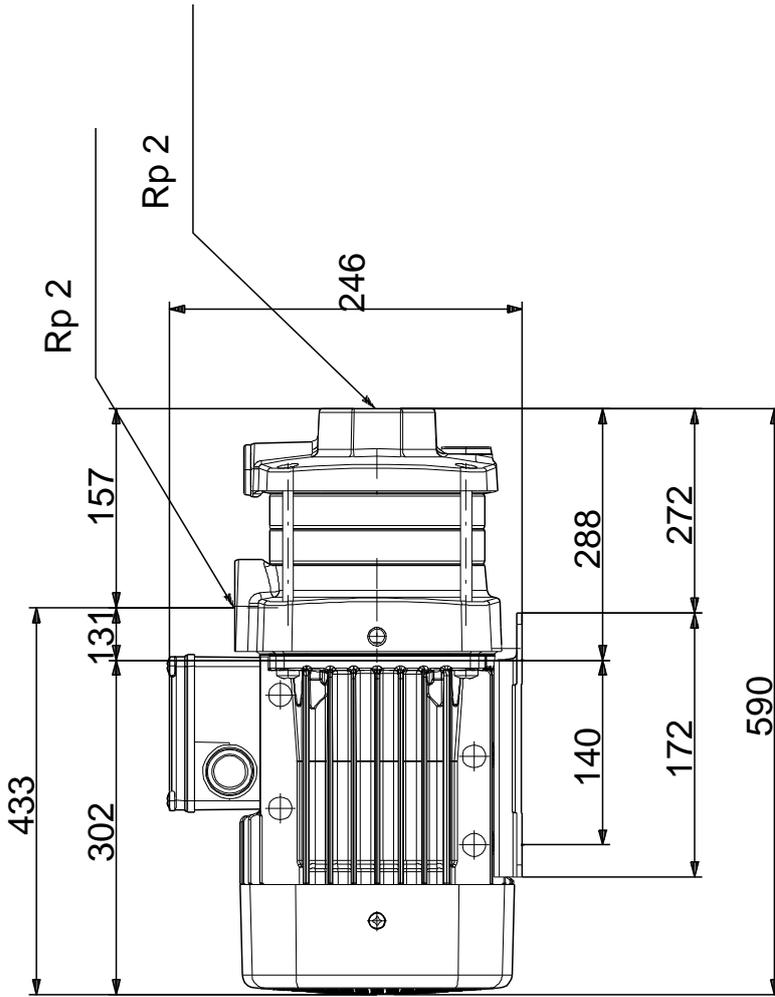

Note! All units are in [mm] unless others are stated.  
Disclaimer: This simplified dimensional drawing does not show all details.