

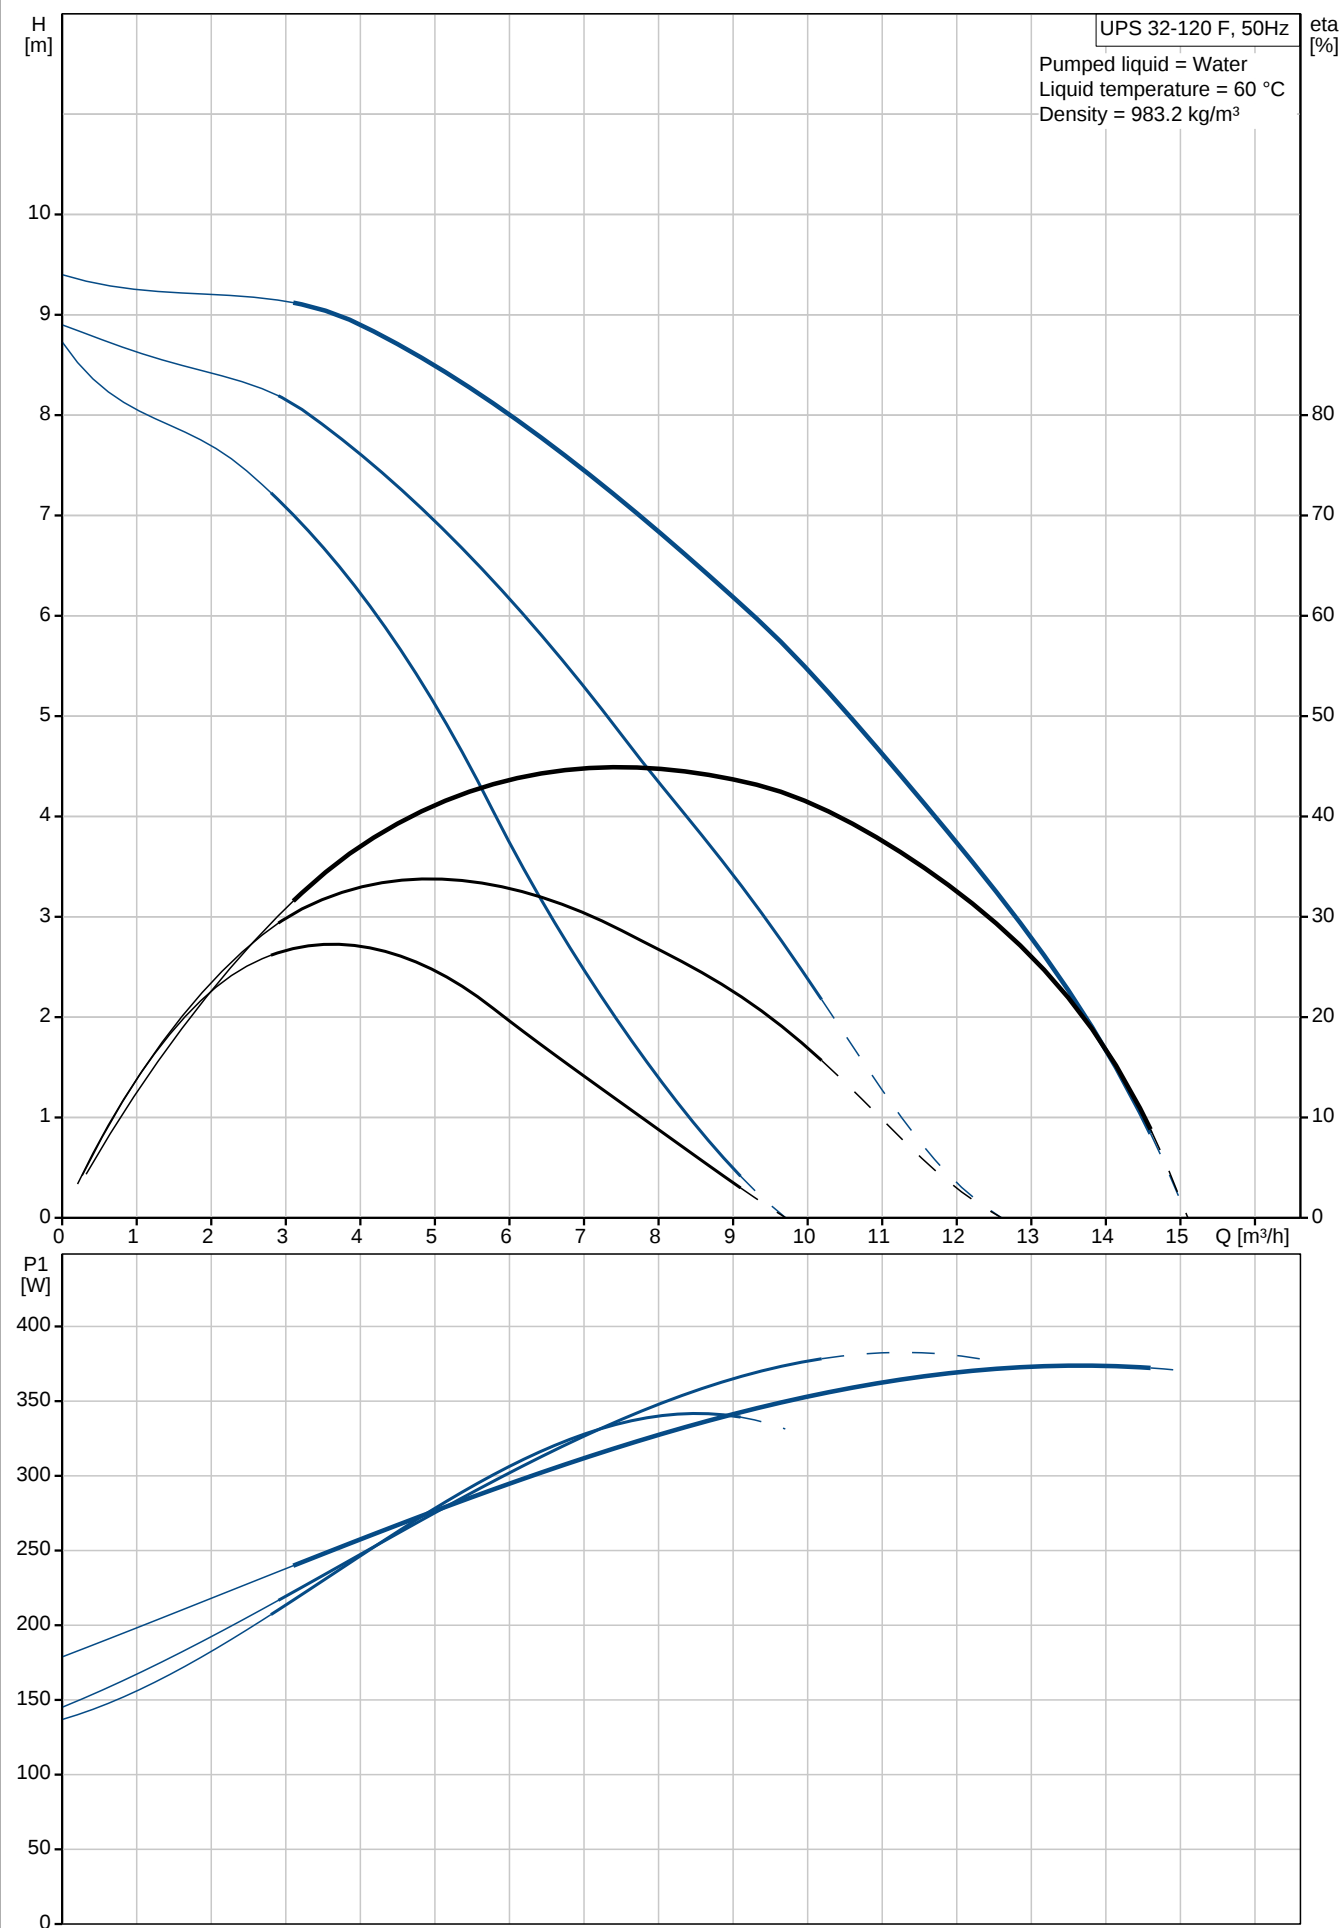
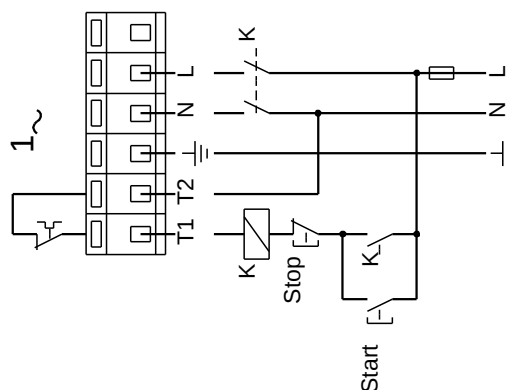
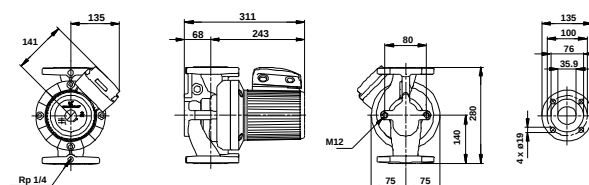



96402959 UPS 32-120 F 50 Hz

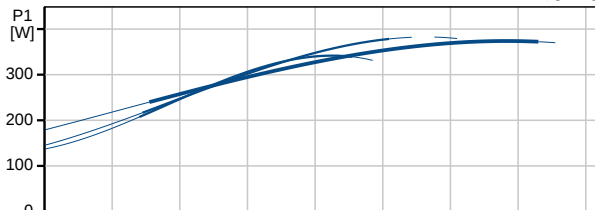

Description	Value
Product name:	UPS 32-120 F
Product No:	96402959
EAN number:	5700390687496
Price:	On request
Technical:	
Speed no:	3
Head max:	120 dm
Approvals on nameplate:	CE
Materials:	
Pump housing:	Cast iron
	EN-JL1040
	ASTM 35 B - 40 B
Impeller:	Stainless steel
	DIN W.-Nr. 1.4301
	AISI 304
Installation:	
Range of ambient temperature:	0 .. 40 °C
Maximum operating pressure:	10 bar
Flange standard:	JIS
Pipe connection:	32 A
Pressure stage:	10 K
Port-to-port length:	280 mm
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	-10 .. 120 °C
Liquid temp:	60 °C
Density:	983.2 kg/m ³
Kinematic viscosity:	1 mm ² /s
Electrical data:	
Power input in speed 1:	345 W
Power input in speed 2:	380 W
Max. power input:	380 W
Mains frequency:	50 Hz
Rated voltage:	1 x 100-110 V
Current in speed 1:	3.95 A
Current in speed 2:	4.25 A
Current in speed 3:	4.03 A
Cos phi in speed 1:	0,87
Cos phi in speed 2:	0,89
Cos phi:	0,94
Capacitor size - run:	40 µF/250 V
Enclosure class (IEC 34-5):	X4D
Insulation class (IEC 85):	H
Motor protec:	CONTACT
Thermal protec:	external
Controls:	
Relay:	without relay
Pos term box:	1.30H
Others:	
Net weight:	18.3 kg
Gross weight:	18.5 kg
Shipping volume:	0.034 m ³
Sales region:	Japan

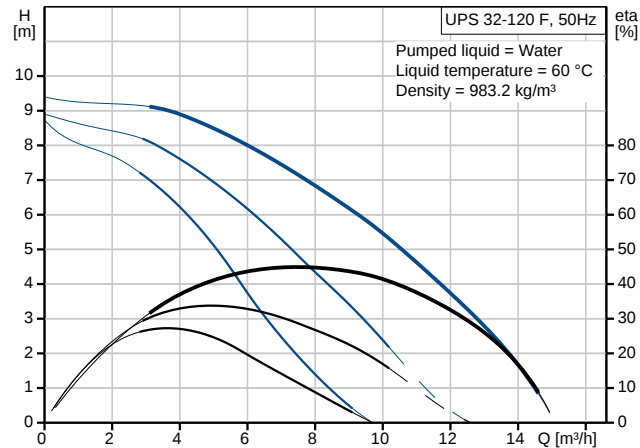

96402959 UPS 32-120 F 50 Hz

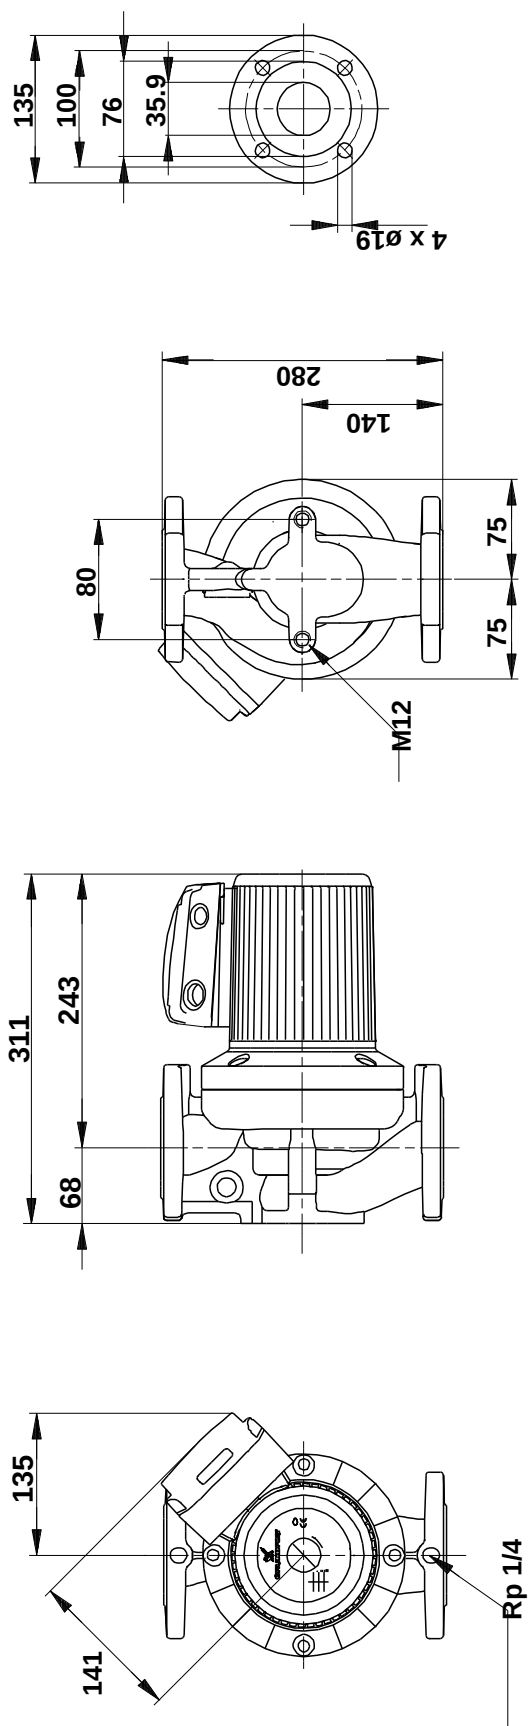

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.